


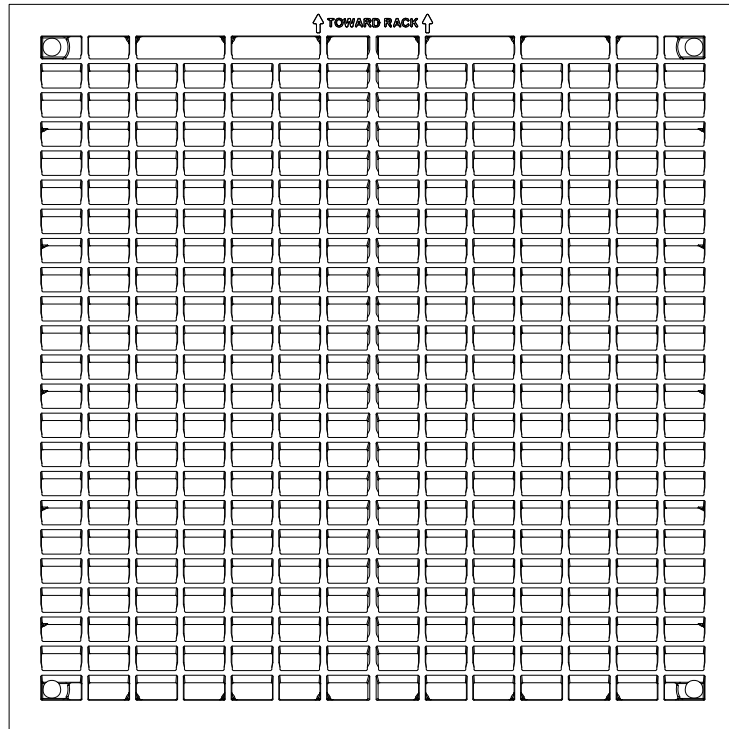

TOP VIEW

SPECIFICATIONS

- Die cast aluminum construction
- Interchangeable with laminated ConCore® and All Steel panels
- 60% open area without damper
- Panel size: 24 inches square
- Panel weight: 6.45lb./ft²
- Patented directional air flow design

UNDERSTRUCTURE OPTIONS


- ☐ 4' bolted stringer system

COATING OPTIONS

- ☐ Fog Grey anti-static powder coat finish

AIRFLOW CONTROL OPTIONS

- ☐ PowerAir® Quad (field mounted)
- ☐ Single-zone Opposed Blade Damper (field mounted)
- ☐ Multi-zone Opposed Blade Damper (field mounted)

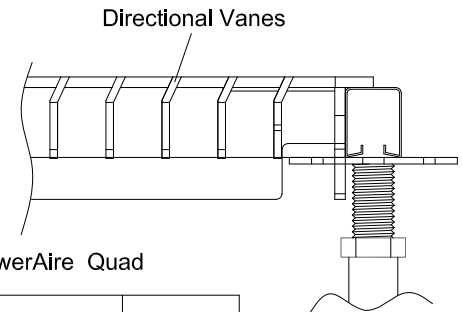

Airflow Performance

Static Pressure (in. H ₂ O)	Air Volume w/o damper (CFM)
0.02	1155
0.04	1730
0.05	1855
0.06	2050
0.08	2380
0.10	2775

Opposed Blade Damper

Air Volume w/damper open(CFM)	Air Volume w/damper closed(CFM)
990	110
1465	120
1720	145
1750	180
2035	200
2325	225

PowerAir Quad

Static Pressure (in. H ₂ O)	CFM at 0% power	CFM at 100% power
0.02	250	2035
0.04	350	2110
0.05	400	2120
0.06	475	2145
0.08	580	2155
0.10	720	2160

System Load Performance Criteria (Tested on Actual Understructure)*


System Type	SYSTEM WEIGHT	STATIC LOADS			ROLLING LOADS		IMPACT LOADS	CAPTURE INDEX
Panel Understructure		Design Loads	Safety Factor (min. 1.66)	Ultimate Load	10 Passes	10,000 Passes		
DirectAir AL Bolted Stringer	7.9 lbs / ft²	1500 lbs	Pass	2500 lbs.	1250 lbs	1000 lbs	150 lbs	92%

1. System Design Load is based on permanent set ≤ 0.010" and is verified by loading panels in accordance with the CISC concentrated load method but with panels installed on actual understructure instead of steel blocks. Ultimate, Rolling, and Impact Load tests are performed using CISC test procedures.


2. Safety Factor Is Ultimate Load divided by Design Load.



Tate reserves the right to amend product information without prior notice. Care has been taken to ensure that the contents of this publication are accurate, but Tate, its parent company and its subsidiary companies do not accept responsibility for errors or information that is found to be misleading or outdated. Suggestions for, or descriptions of, technical specifications and the end user or application of products are provided and must be verified prior to use. To ensure you are viewing the most recent and accurate product information, please scan the QR code.

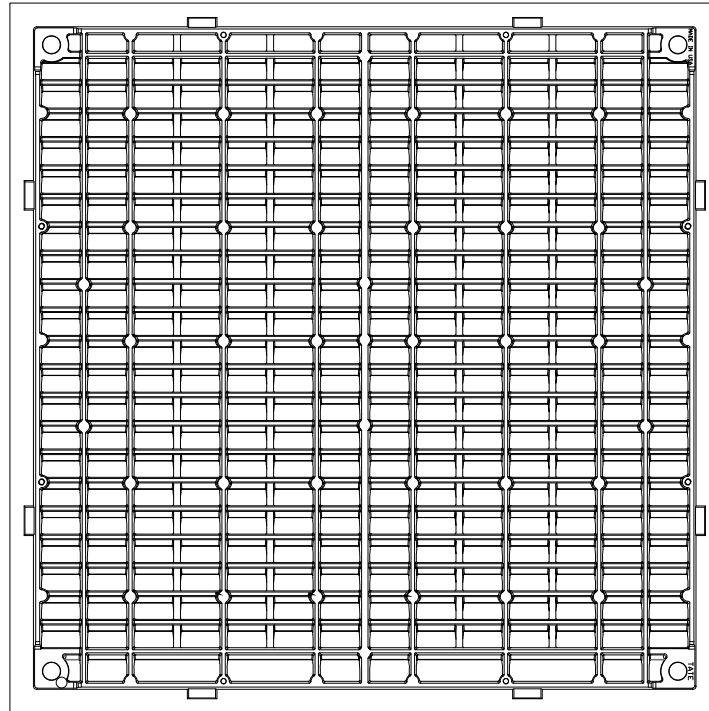

BOTTOM VIEW

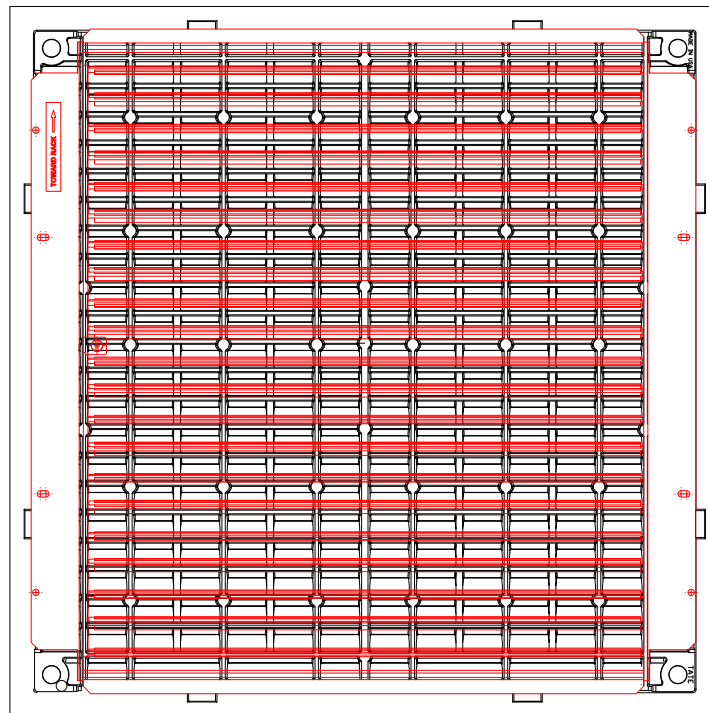

**BOTTOM VIEW WITH OPTIONAL
OPPOSED BLADE DAMPER**



Tate reserves the right to amend product information without prior notice. Care has been taken to ensure that the contents of this publication are accurate, but Tate, its parent company and its subsidiary companies do not accept responsibility for errors or information that is found to be misleading or outdated. Suggestions for, or descriptions of, technical specifications and the end user or application of products are provided and must be verified prior to use. To ensure you are viewing the most recent and accurate product information, please scan the QR code.